


CrMo tubes, forks and stays



ISHIWATA SEISAKUSHO CO:LTD.

Japan

Ref	Out side Diameter (mm)		Thickness (mm)			Lenght (mm)	Weight (g)
			T ₁	T ₂	T ₃		
10C	25.4	DB	0.8	0.5	0.8	580	240
11C	25.4	DB	0.9	0.6	0.9	580	250
13C	25.4	DB	1.0	0.7	1.0	580	305
14C	25.4	PG	0.8	0.8	0.8	580	290
15C	25.4	DB	0.6	0.4	0.6	580	170
17C	25.4	DB	0.7	0.4	0.7	580	205
20C	28.6	DB	0.7	0.4	0.7	610	230
21C	28.6	SB	0.8	0.5	0.5	610	250
22C	28.6	SB	0.9	0.6	0.6	610	305
23C	28.6	SB	1.0	0.7	0.7	610	360
24C	28.6	PG	1.0	1.0	1.0	610	420
25C	28.6	SB	0.7	0.4	0.4	610	195
30C	28.6	DB	0.8	0.5	0.8	610	280
31C	28.6	DB	0.9	0.6	0.9	610	325

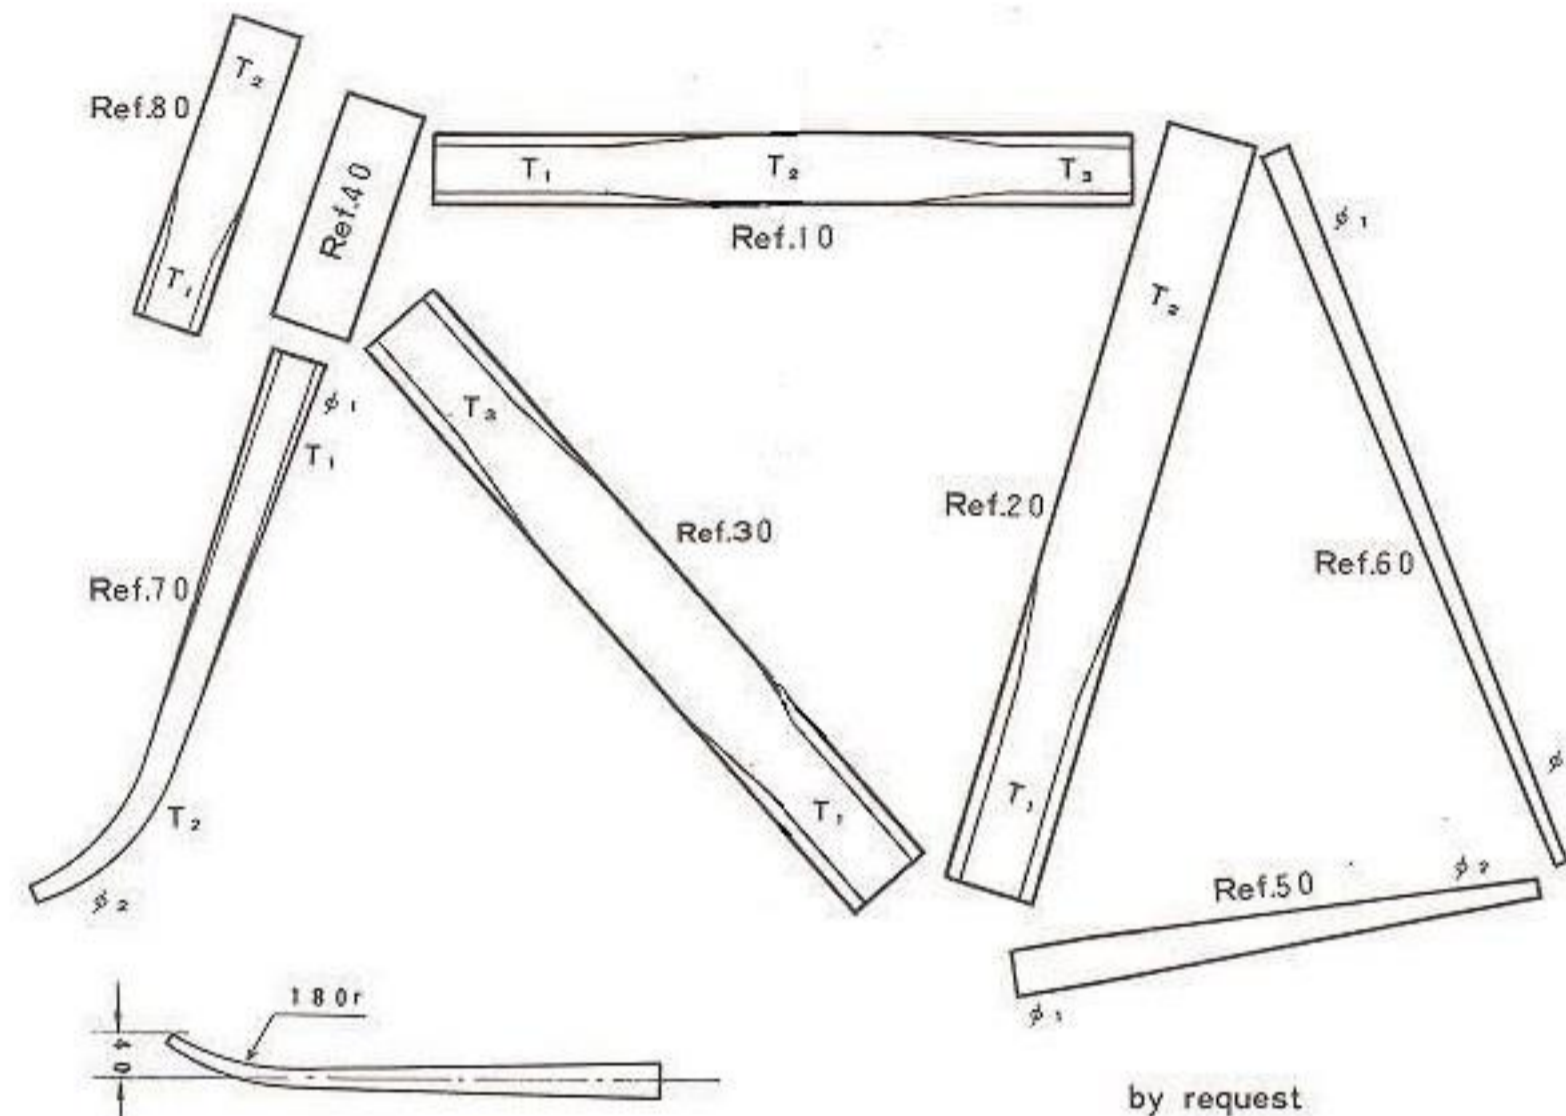

71C Oval 29X16
73C Oval 28X20

- by request
- 1 Ref 20C~35C
Max.Length 630mm
 - 2 French size

Ref	out side Diameter (mm)		Thickness (mm)			Lenght (mm)	Weight (g)
	φ ₁	φ ₂	T ₁	T ₂	T ₃		
32C	28.6	DB	1.0	0.7	1.0	610	350
35C	28.6	DB	0.6	0.35	0.6	610	200
40C	31.8	PG	1.0			200	150
40CS	31.8	PG	1.0			180	140
41C	31.8	PG	0.7			180	100
50C	22.2	T 11.0	0.8			430	165
51C	22.2	T 11.0	0.55			410	105
60C	14.5	T 9.0	0.6			610	115
61C	14.0	T 9.0	0.8			610	140
70C	23.0	TG 10.0	1.0	0.8		400	160
71C	23.0	T 10.0	1.0	1.0		400	170
73C	24.0	T 10.0	1.0	1.0		400	190
80C	25.4	SB	2.2	1.6(spline)		200	170
81C	25.4	SB	2.2	1.6		200	205

Articles Guarantee Marks				Articles			
Description				Description			
Top tube	Ref 15C 170	Ref 17C 205	Ref 10C 240	Top tube	Ref 11C 250	Ref 13C 305	Ref 14C 290
Seat tube	25C 195	20C 230	21C 250	Seat tube	22C 305	23C 360	24C 420
Down tube	35C 200	20C 230	30C 280	Down tube	31C 325	32C 350	24C 420
Head tube	41C 100	40CS 140	40CS 140	Head tube	40C 150	40C 150	40C 150
Chain stays	51C 210	50C 330	50C 330	Chain stays	50C 330	50C 330	50C 330
Seat stays	60C 230	60C 230	60C 230	Seat stays	61C 280	61C 280	61C 280
Fork blades	70C 320	70C 320	71C 340	Fork blades	71C 340	73C 380	73C 380
Fork stem	80C 170	80C 170	80C 205	Fork stem	81C 205	81C 205	81C 205
Total Weight	1595g	1855g	2015g	Total Weight	2185g	2360g	2475g